ACO Drain® FlowDrain FG200

8" Internal Width Fiberglass System

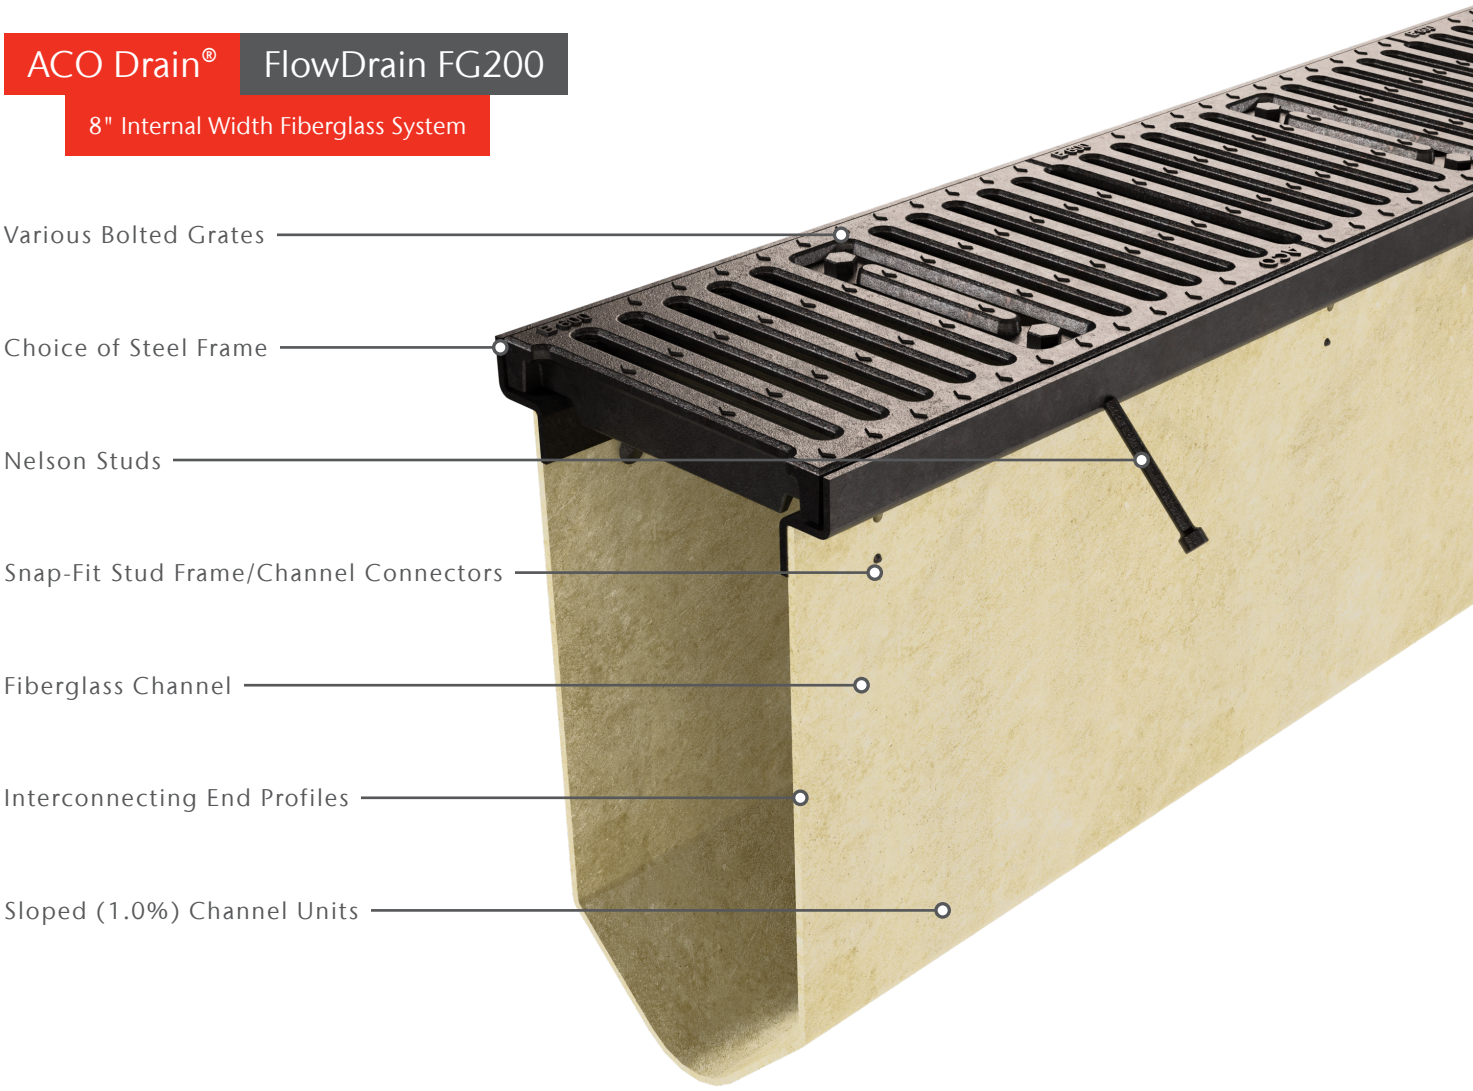

FG200 is an 8" wide sloping fiberglass system with a choice of steel slotted Class C (25 ton) or ductile iron Class E (60 ton) grates. Grates are bolted into the steel frame with 2 bolts per 18" section.

Accessories are available for pipe conections, catch basins, and closing the trench.

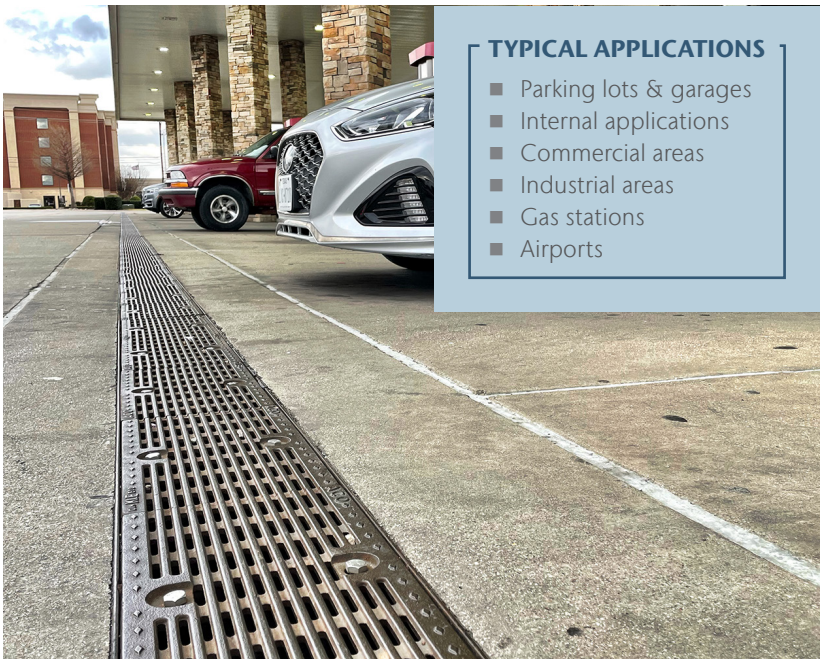

TYPICAL APPLICATIONS

- Parking lots & garages
- Internal applications
- Commercial areas
- Industrial areas
- Gas stations
- Airports

ACO Drain® FlowDrain FG200

8" Internal Width Fiberglass System

4-BOLT LOCKING SYSTEM

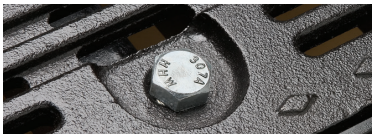

Bolted FG200 grates offer mechanical, secure fixing of grates into the channel frame. Two bolts per 18" grate section lock into cross bars in the steel frame. Care must be taken to ensure that all bolts are secure and are not overtightened which can damage the frame.

BAR STEEL
LOAD CLASS C



SLOTTED IRON
LOAD CLASS E

LONGITUDINAL IRON
LOAD CLASS E

System Layout

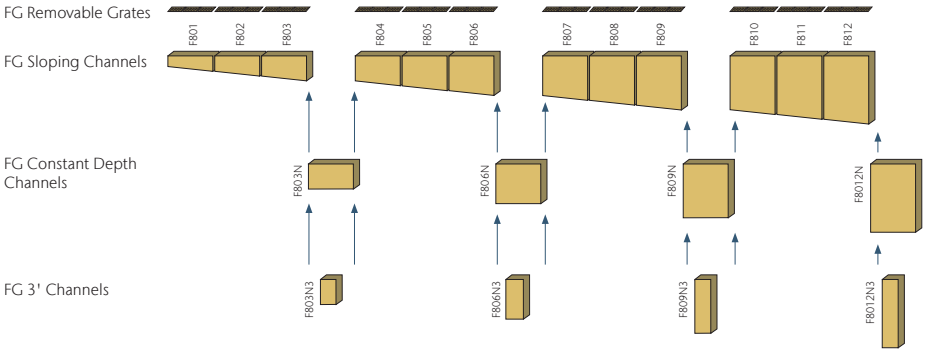

Closing Endcaps
(Male/Female)

Outlet Endcap 4"/6"/8"
Bottom Outlet Adapter 4"/6"/8"
F660 Catch Basin
F880 Catch Basin



ACO Systems, Ltd.

East Office
2910 Brighton Rd.
Oakville, ON L6H 5S3
Phone: 905-829-0665
Fax: 905-829-2908

West Office
#311-3602 Gilmore Way
Burnaby, BC V5G 4W8
Phone: 604-554-0688
Fax: 604-554-0693

Toll Free
877-226-4255

Email
info@acocan.ca
Web
www.acocan.ca

© March 2023 ACO Systems, Ltd.
All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO Systems, Ltd. reserves the right to change products and specifications without notice.